



LG Incite Back Panel Replacement

This guide will show you how to remove the back panel of your phone.

Written By: Kimberly Kha



INTRODUCTION

Many hardware repairs require access to the internal components of your phone. This guide will show you how to remove the back panel of your phone to access its internal hardware.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Flip your phone over and locate the battery cover.

Step 2




- Slide the cover downward to reveal the battery below.

Step 3



- Place the plastic opening tool in the divet in the bottom left-hand corner.
- Pry the battery upward to remove it.

Step 4 — Back Panel

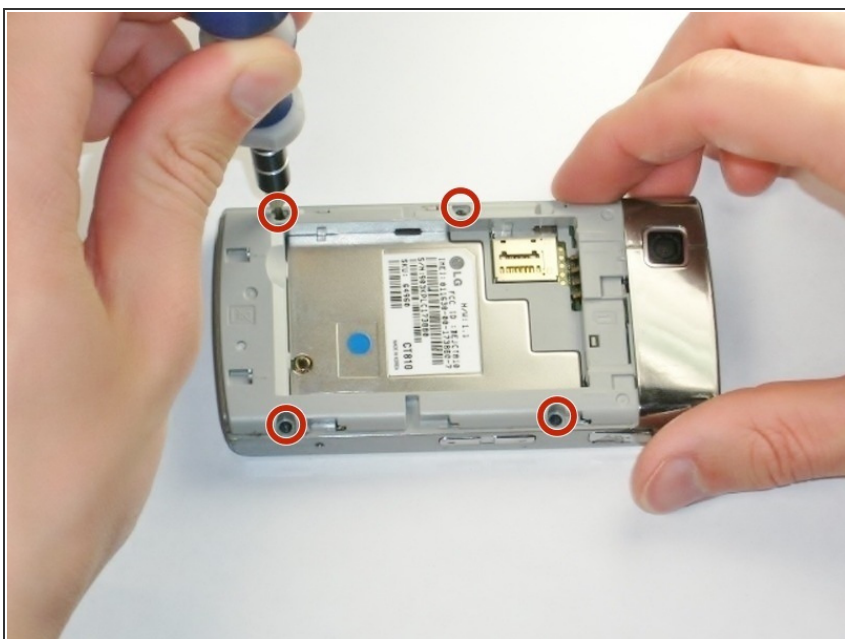

- Unscrew the four 4.5mm screws using the Philips #00 screw driver.

Step 5



- Wedge the plastic opening tool between the screen and the case.
- Gently move the tool along the edge to loosen the screen from the casing. Repeat this for the entire outer edge of the screen.
- ⓘ You should not completely separate the screen from the case in this step.

Step 6



- Flip your phone over to the battery side.
- Push the plastic opening tool into the lower seam between the frame and front cover to separate the back panel.
- ⚠ Push the scroll wheel, located in the upper left corner, in while lifting the back cover off to prevent breaking it.
- ⚠ The volume, lock, and camera buttons are loose so don't lose them.

To reassemble your device, follow these instructions in reverse order.

